






Designer Colour Guide



Desert Sand
UVR 94%
SHADE 88%



Cinnamon
UVR 92.9%
SHADE 90.5%



Silver Grey
UVR 94%
SHADE 93%



Charcoal
UVR 97%
SHADE 96%



Black
UVR 98%
SHADE 98%



Navy
UVR 97%
SHADE 94%



Royal Blue
UVR 96%
SHADE 91%




Laguna Blue
UVR 96%
SHADE 95%




Rainforest
UVR 100%
SHADE 93%



Turquoise
UVR 92%
SHADE 86%




Olive
UVR 93.9%
SHADE 91.9%



Terracotta
UVR 95%
SHADE 91%



Mulberry
UVR 97%
SHADE 94%



Rust Gold
UVR 97%
SHADE 94%




Chocolate
UVR 96.6%
SHADE 95.9%



Sunset Red
UVR 92.9%
SHADE 87%

All weather shade protection

DRI-Z provides weather protection from the wind, rain and sun, filtering up to 100% of harmful UV-Radiation whilst allowing natural light transmission.

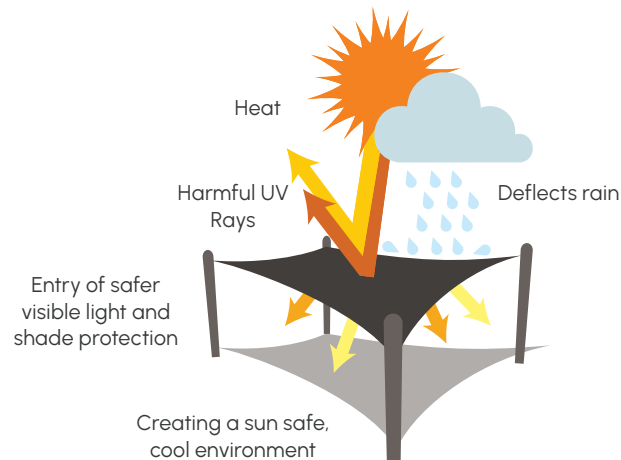

Weather Protection



Excellent UV-R Protection
(Up to 100%)



Fire Rated Fabric AS-1530.2.1993



Easy Care & Maintenance



High Tensile Strength



Natural Light Transmission



Great Heat & Glare Reduction



Proven Durability & Longevity





Suggested Specification

DRI-Z fabric combines the worldwide leading Z16 shade fabric with an ultraviolet stabilised clear polyethylene waterproof coating to produce a unique lightweight all weather shade fabric.

Technical Properties				
Weight: 280 GSM	Width: 3 metres		Roll length: 33 metres	Roll weight: 27 kg
Strength Characteristics	Result		Standard	
Breaking force - warp	616	N	AS2001.2.3.1-2002	
Breaking force - weft	1143	N	AS2001.2.3.1-2002	
Tear resistance - warp	111	N	AS2001.2.10-1986	
Tear resistance - weft	180	N	AS2001.2.10-1986	
Bursting pressure	2500	kPa	AS2001.2.4-1990	
Solar Protection Properties				
Providing up to 100% UVR Block and 50+UPF			Tested to Australian Standard AS 4174-1994	
Flame Retardancy				
Tested to Australian Standard AS 1530.2.1993				
DRI-Z Fabric Composition				
Fabric Base:	Z16 knitted high density polyethylene fabric			
Fabric Coating:	Ultraviolet stabilised polyethylene			
DRI-Z Fabric Range	16 colours			
Fabrication				
DRI-Z fabric can be sewn and sealed or welded using hot air or hot wedge welders.				
Additional Resources				
The recommended guidelines for shade fabric care and maintenance are presented in the Rainbow Shade Owner's Manual booklet. Please contact Rainbow Shade for a hard copy or PDF version.				
Warranty				
Rainbow Shade Offer a five year limited UV fabric warranty. In order for the fabric warranty to apply, the DRI-Z must be installed with the clear coated surface facing downwards. For more information and a copy of the warranty document please contact Rainbow Shade.				