

# RAINBOW SHADE

***DRiZ***




ALL WEATHER SHADE PROTECTION



**Cinnamon**

UVR BLOCK 92.9%  
SHADE 90.5%




**Charcoal**

UVR BLOCK 97%  
SHADE 96%




**Silver Grey**

UVR BLOCK 94%  
SHADE 93%



**Desert Sand**

UVR BLOCK 94%  
SHADE 88%




**Black**

UVR BLOCK 98%  
SHADE 98%




**Navy**

UVR BLOCK 97%  
SHADE 94%



**Royal Blue**

UVR BLOCK 96%  
SHADE 91%



**Laguna Blue**

UVR BLOCK 96%  
SHADE 95%




**Rainforest**

UVR BLOCK 100%  
SHADE 93%



**Turquoise**

UVR BLOCK 92%  
SHADE 86%




**Olive**

UVR BLOCK 93.9%  
SHADE 91.9%



**Terracotta**

UVR BLOCK 95%  
SHADE 91%



**Mulberry**

UVR BLOCK 97%  
SHADE 94%



**Rust Gold**

UVR BLOCK 97%  
SHADE 94%



**Chocolate**

UVR BLOCK 96.6%  
SHADE 95.9%



**Sunset Red**

UVR BLOCK 92.9%  
SHADE 87%

## ALL WEATHER SHADE PROTECTION

DRi-Z provides weather protection from the wind, rain and sun, filtering up to 100% of harmful UV-Radiation whilst allowing natural light transmission.



WEATHER PROTECTION




EXCELLENT UV-R PROTECTION  
(UP TO 100%)



HIGH TENSILE STRENGTH



NATURAL LIGHT  
TRANSMISSION

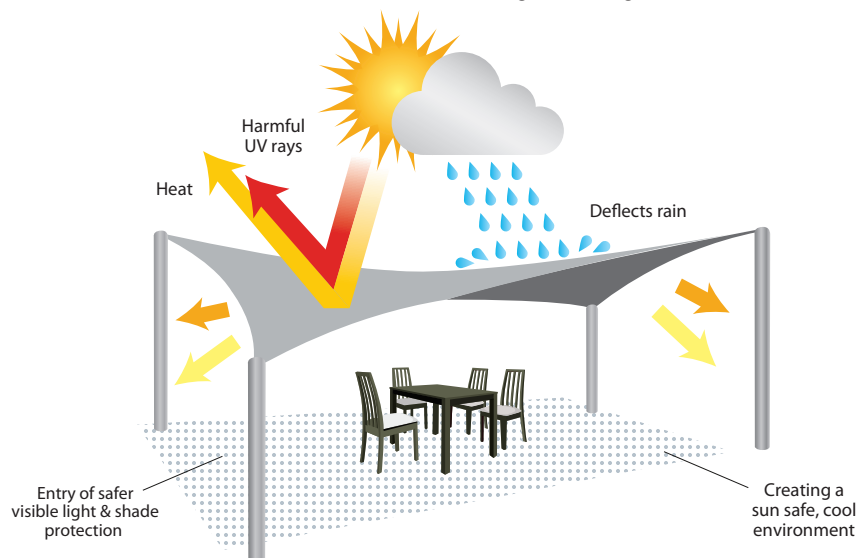

PROVEN DURABILITY  
AND LONGEVITY



EASY CARE AND  
MAINTENANCE



GREAT HEAT AND  
GLARE REDUCTION



FIRE TESTED AS-1530.2.1993



## ALL WEATHER SHADE PROTECTION



DRI-Z fabric combines the worldwide leading ZI6 shade fabric with an ultraviolet stabilised clear polyethylene waterproof coating to produce a unique lightweight all weather shade fabric.

### Technical Properties

Weight: 280 GSM

Width: 3 metres

Roll length: 33 metres

Roll weight: 27 kg

### Strength Characteristics

#### Result

#### Standard

Breaking force -warp	616	N	AS2001.2.3.1-2002
Breaking force - weft	1143	N	AS2001.2.3.1-2002
Tear resistance - warp	111	N	AS2001.2.10-1986
Tear resistance - weft	180	N	AS2001.2.10-1986
Bursting pressure	2500	kPa	AS2001.2.4 -1990

### Solar Protection Properties

Providing up to 100% UVR Block and 50+UPF

Tested to Australian Standard AS 4174-1994

### Fire Properties

Tested to Australian Standard AS 1530.2.1993

### DRI-Z Fabric Composition

Fabric Base:	ZI6 knitted high density polyethylene fabric
Fabric Coating:	Ultraviolet stabilised polyethylene
DRI-Z Fabric Range	16 colours

### Fabrication

DRI-Z fabric can be sewn and sealed or welded using hot air or hot wedge welders.



### Additional Resources

The recommended guidelines for shade fabric care and maintenance are presented in the Rainbow Shade Owner's Manual booklet. Please contact Rainbow Shade for a hard copy or PDF version.



### Warranty

Rainbow Shade Offer a five year limited UV fabric warranty. In order for the fabric warranty to apply, the DRI-Z must be installed with the clear coated surface facing downwards. For more information and a copy of the warranty document please contact Rainbow Shade.

• QUALITY

• SERVICE

• INTEGRITY

[www.rainbowshade.com.au](http://www.rainbowshade.com.au)