


Australian Wool Testing Authority Ltd - trading as AWTA Product Testing A.B.N 43 006 014 106 1st Floor, 191 Racecourse Road, Flemington, Victoria 3031 P.O Box 240, North Melbourne, Victoria 3051 Phone (03) 9371 2400 Fax (03) 9371 2499

## **TEST REPORT**

Client : Halifax Voge 29 Henderso Turrella NSV		Test Number Issue Date Print Date	: 19-00601 : 21/10/20 : 21/10/201	19
		Order Number	: 530510	
Sample Description	Clients Ref : "VTU Basalt- 022176" Coated mesh fabric Colour : grey End Use : Blinds and Awnings Nominal Composition : 70% PVC, 30% Polyester Nominal Mass per Unit Area/Density : 605g/m2 Nominal Thickness : 0.82mm			
6 1530.2-1993	Methods for Fire Tests on Building Materials, Compor Part 2: Test for Flammability of Materials Date Tested	nents and Structur	<b>res.</b> 21/10/2019	
	Flammability Index		1	
	· · · · · · · · · · · · · · · · · · ·		Width	
		Lenath		
	Spread Factor	Length 0		
	Spread Factor Heat Factor	Length 0 1	0	
	-	0	0	
	Heat Factor	0	0	
	Heat Factor Maximum height (d)	0 1	0 1	%
	Heat Factor Maximum height (d) Mean	0 1 2.1	0 1 2.9	%
	Heat Factor Maximum height (d) Mean Coefficient of Variation	0 1 2.1	0 1 2.9	% °C.min
	Heat Factor Maximum height (d) Mean Coefficient of Variation Heat (a)	0 1 2.1 9.8	0 1 2.9 7.0	
	Heat Factor Maximum height (d) Mean Coefficient of Variation Heat (a) Mean	0 1 2.1 9.8 1.6	0 1 2.9 7.0 1.9	°C.min

These test results relate only to the behaviour of the test specimens of the material under the particular conditions of the test, and they are not intended to be the sole criterion for assessing the potential fire hazard of the material in use.

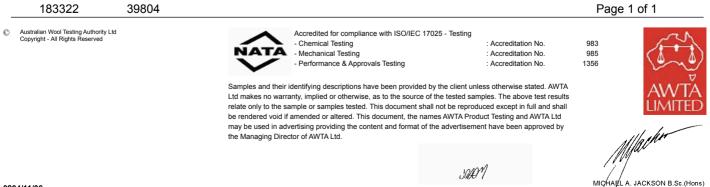

APPROVED SIGNATORY

MANAGING DIRECTOR